



**ASBW**

**Precision machining brass rod**

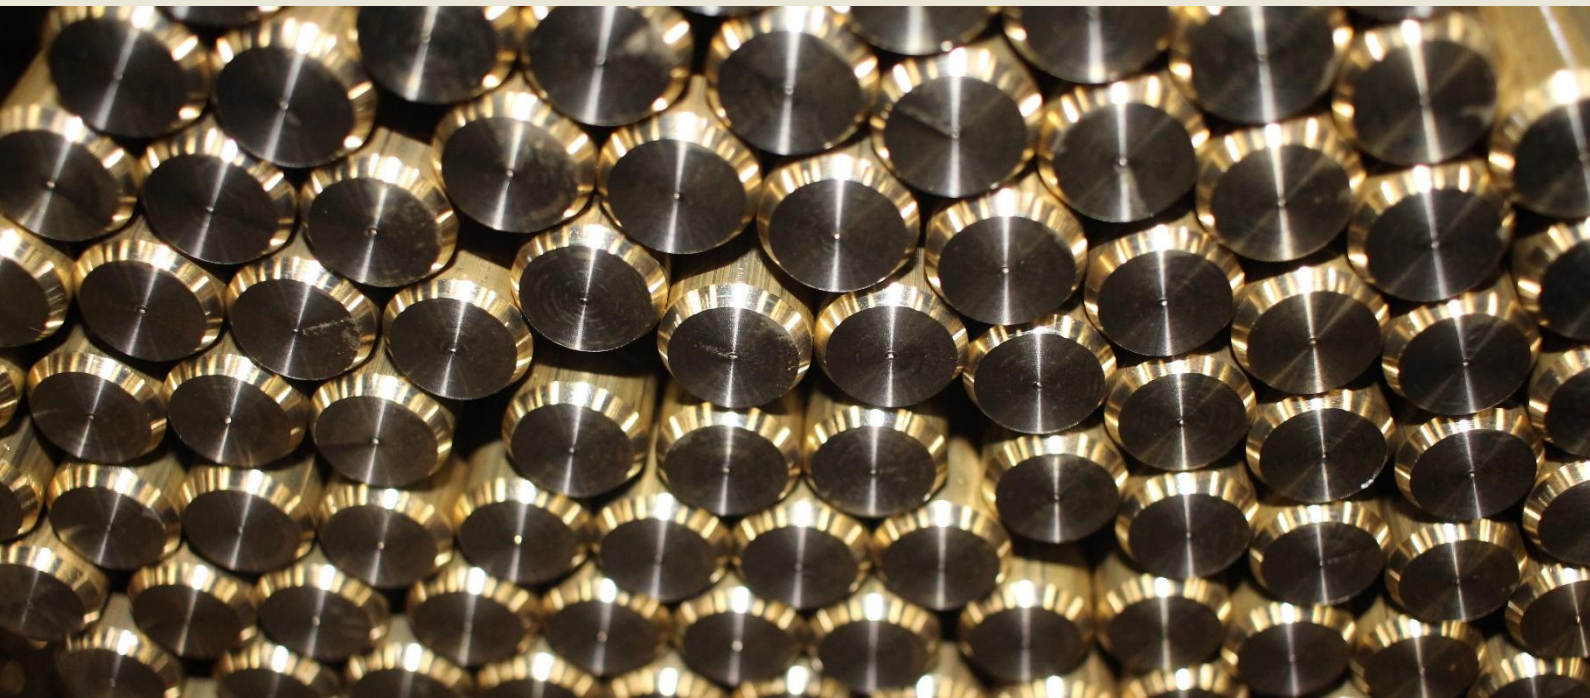

*The satisfaction of our customers' requests is the  
guarantee of our high standards compliance and  
quality consistency*

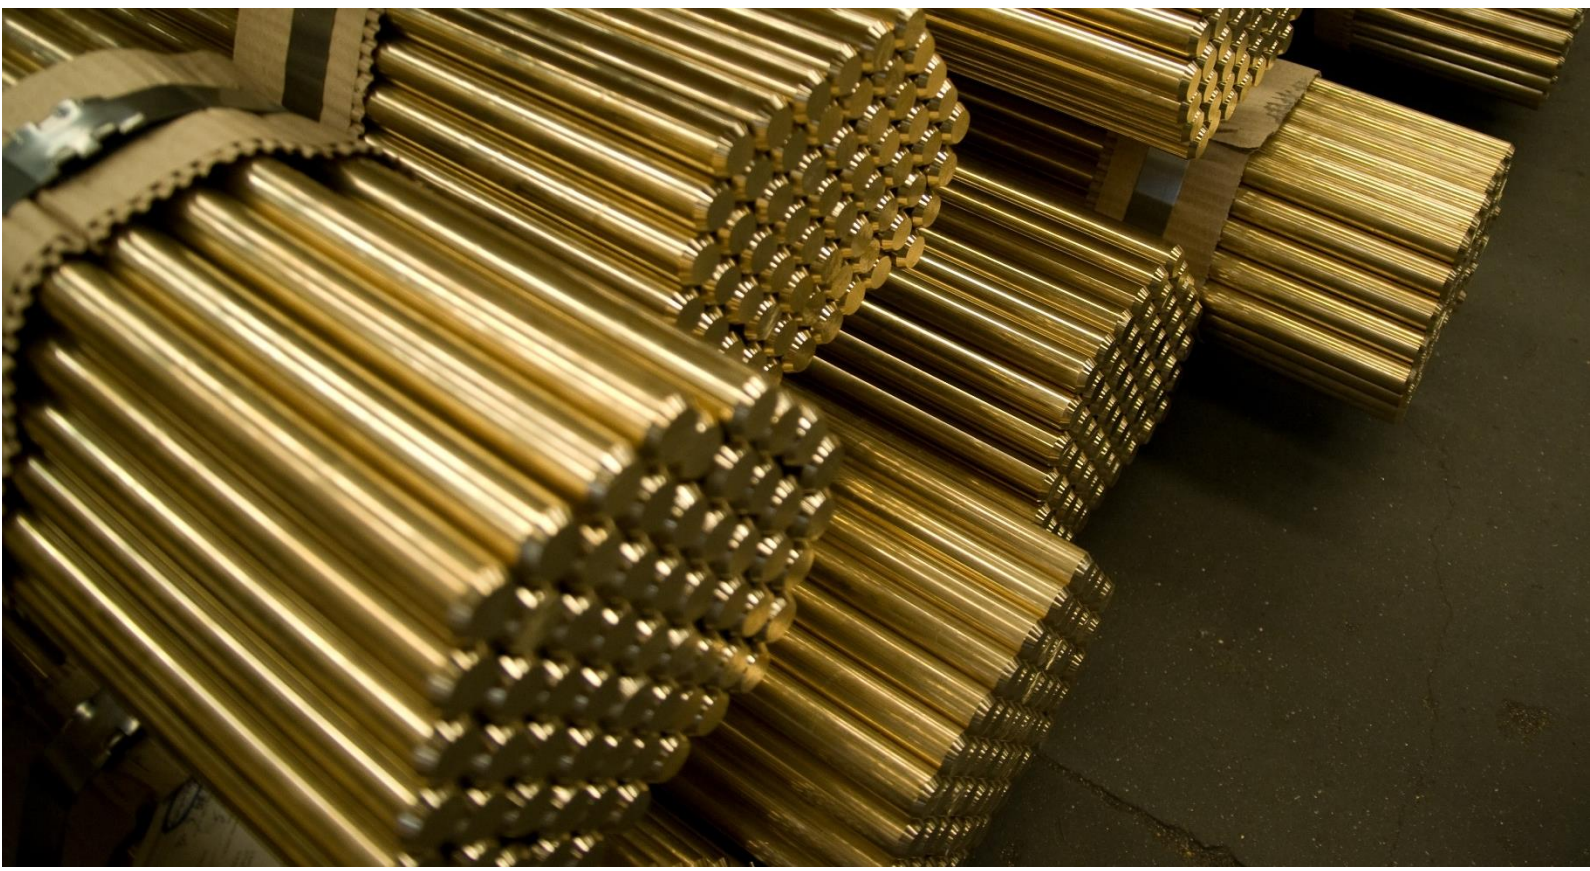

# Quality machined to Perfection

## Distinguishing parameters

- Strict control since raw material selection process ensure high consistency in the alloy properties
- Refined metallographic structure
- Increased lifetime of the tools due to reduced impurity levels, control of alpha and beta phases and lead distribution
- Fine chips deriving from homogeneous lead distribution all over the material microstructure
- Best-selling alloys:

Material designation					Reference chemical composition (%)		
ASBW	International	EN	UNS	JIS	Cu	Pb	Zn
<b>B14</b>	CuZn39Pb3	CW614N	C38500	C3603 C3604	58,0	3,0	Rem.
<b>B13</b>	CuZn40Pb2	CW617N	C37800 C38000	C3603 C3604 C3651	58,0	2,0	Rem.

### Lead distribution



Lead acts as a lubricant, decreasing the friction coefficient between the machining tools and the material. **ASBW** machining brass rods have a homogeneous lead distribution, that promotes chips fragmentation during its conformation, reducing the cutting force and tool wear



- All available alloys:

		Material Designation					Reference Chemical Composition in %(p/p) (Main Elements) ***										
ASBW	International	EN	UNS	JIS	FURTHER RESTRICTIONS	Cu	Pb	Ni	Fe	As	Sn	Al	Mn	Bi	Si	Zn	
Lead Containing Alloys	B01	CuZn35Pb1	CW600N	C34000	-	-	63,0	1,2	0,2	0,1	-	0,1	0,03	-	-	-	Rem.
	B02*	CuZn35Pb1.5Al As	CW625N	-	-	4 MS Common Approach, Part B	63,0	1,4	0,1	0,2	0,1	0,2	0,6	-	-	-	Rem.
	B03	CuZn37Pb1	CW605N	C35000	C3712	-	62,0	1,2	0,2	0,2	-	0,2	0,03	-	-	-	Rem.
	B04	CuZn36Pb3	CW603N	C36000	C3601 C3602 C3603	4 MS Common Approach, Part B	61,0	3,0	0,2	0,2	-	0,1	0,03	-	-	-	Rem.
	B07	CuZn39Pb1	CW611N	-	C3771	-	59,5	1,2	0,2	0,2	-	0,2	0,03	-	-	-	Rem.
	B08	CuZn39Pb0,5	CW610N	C36500	C4641	-	60,0	0,5	0,2	0,1	-	0,2	0,03	-	-	-	Rem.
	B09*	CuZn39Pb2	CW612N	C37700	C3771	4 MS Common Approach, Part B	59,5	2,0	0,2	0,2	-	0,2	0,03	-	-	-	Rem.
	B10	CuZn36Pb2As	CW602N	C35330	-	-	62,0	2,3	0,2	0,1	0,1	0,1	0,03	-	-	-	Rem.
	B11	CuZn37Pb2	CW606N	C35300	C3601	-	61,5	2,0	0,2	0,1	-	0,1	0,03	-	-	-	Rem.
	B12	CuZn35Pb2	CW601N	C34200 C34500	C3601	-	62,5	2,0	0,2	0,1	-	0,1	0,03	-	-	-	Rem.
	B13*	CuZn40Pb2	CW617N	C37800 C38000	C3603 C3604	4 MS Common Approach, Part B	58,0	2,0	0,1	0,2	-	0,2	0,03	-	-	-	Rem.
	B14*	CuZn39Pb3	CW614N	C38500	C3603 C3604	4 MS Common Approach, Part B	58,0	3,0	0,2	0,2	-	0,2	0,03	-	-	-	Rem.
	B15	CuZn38Pb2	CW608N	C37700	C3771	-	60,5	2,0	0,2	0,1	-	0,1	0,03	-	-	-	Rem.
	B16	CuZn38Pb1	CW607N	C37000	C3712	-	60,5	1,0	0,2	0,1	-	0,1	0,03	-	-	-	Rem.
B24	CuZn37Mn3Al2 PbSi	CW713R	C67420	C6782	-	58,0	0,6	0,5	0,5	-	0,2	1,8	1,0	-	0,7	Rem.	
Low Lead Alloys	B17*	CuZn42	CW510L	C28500	-	4 MS Common Approach, Part B	58,0	0,1	0,2	0,2	-	0,2	0,03	-	-	-	Rem.
	B18*	CuZn40	CW509L	-	C3712	4 MS Common Approach, Part B	60,0	0,1	0,2	0,1	-	0,1	0,03	-	-	-	Rem.
	B20	CuZn38As	CW511L	C27453	-	4 MS Common Approach, Part B	62,5	0,1	0,2	0,1	0,1	0,1	0,03	-	-	-	Rem.
	B22	CuZn40Bi0,7Al 0,5Pb0,1**	According to SDWA of EPA****	-	-	-	58,0	0,1	0,2	0,2	-	0,2	0,03	-	0,7	-	Rem.
	B23	CuZn40Bi0,7Al 0,5Pb0,2**	According to SDWA of EPA****	-	-	-	58,0	0,2	0,2	0,2	-	0,2	0,03	-	0,7	-	Rem.

\*For drinking water applications, there are restrictions to the chemical composition the materials listed in this table according to the specified in the 4 MS Common Composition List. In this case, on the ordering information must be specified the reference for DW (drinking water). This information is mandatory in the case in which the product is used in drinking water applications according to the 4 MS Common Composition List and not to be given in the other cases.

\*\* Internal Designation.

\*\*\* Deviations from these values may occur within the restrictions of the relevant standard specifications.

\*\*\*\* Environment Protection Agency (EPA), Safe Water Drinking Act (SDWA) - ANSI/NSF Standard 61 and Copper Development Association (CDA)

## Geometric properties

Dimensions and tolerances for Round Rods						
Rod Diameter (mm)	Tolerances*		Straightness (According to EN 12164)	Note	Lengths (mm)	
	Diameter (mm)	Class				
		EN 12164				ISO 286-2
5 - 6	+0 -0.030	B	h9	Up on agreement between customer and supplier	3000±50 (more lengths possible up to 5000 mm upon customer's request)	
>6 - 10	+0 -0.036	B	h9			
>10 - 18	+0 -0.043	B	h9			
>18-30	+0 -0.052	B	h9	0,4 mm (localized over any 400 mm length)		
>30-50	+0 -0.100	A	h10			
>50-65	+0 -0.120	A	h10	Up on agreement between customer and supplier		
>65-80	±0.70	-	-			
>80-95	±0.80	-	-			

\*up to.

Your satisfaction is our goal:

- Diameter tolerances tighter than specified in the norm
- For rods from 5 to 65 mm of diameter, the out-of-roundness is residual, deriving from **ASBW** exquisite drawing process
- Homogeneity of the surface appearance, mechanical properties and diameter within and across bundles
- Rod ends shaped to perfectly suit your automated machining process



# Tailored for your production process

## Types of end shaping


By standard, the **ASBW** machining rod is supplied with pointed and chamfered ends according to EN 12164.

Different combinations of rod ends finishing possible on customers request.


Diameter (mm)	Shaped ends*	Shaped ends dimensions**			
		Type A – Chamfer Length (mm)		Type B – Pointed Length (mm)	
		min.	max.	min.	max.
5	1 end chamfered, 1 end pointed	0,2	1,0	1,5	4,0
>5 - 10		0,2	1,5	2,0	7,0
>10 - 20		0,2	2,0	3,0	10,0
>20-30		0,2	3,0	4,0	12,0
>30-65	1 end chamfered, 1 end sawn without burr	0,5	3,0	4,0	12,0
>65-95	Both ends sawn, without burr				

\* Different end shapes available upon customer request

\*\* The ends are typically shaped with a 30° angle. A 45° angle is possible upon customers request.

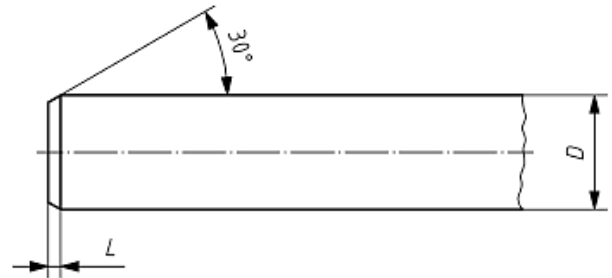


a) Shaped ends of rod, Type A - chamfered

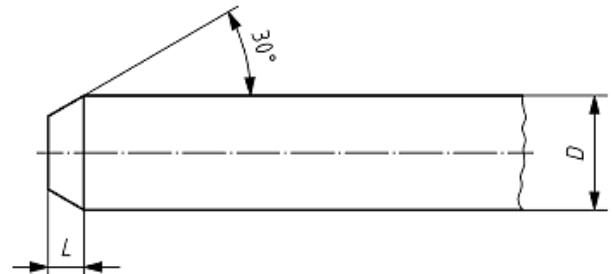

b) Shaped ends of rod, Type B - pointed

## Straightness

The **ASBW** precision machining rod is the ideal solution for your production process, offering high quality standards in terms of straightness in its entire length (**L1**). For round precision machining rods, we offer a gap for the entire deviation of 1 mm/m (**h1**) and a maximum local deviation of 0,4 mm/ ≤ 400 mm (**h2** or **h3**).

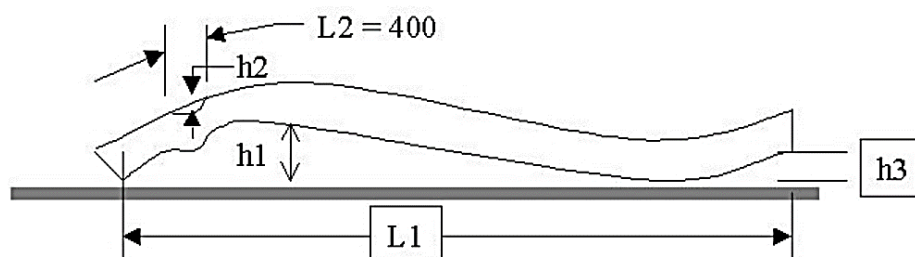

## Packaging

### Size range up to 10 mm

The rods are packed loose in a wooden box and protected with oiled paper (net weight of approx. 500 kg). Each box is strapped with 4 steel straps to ensure material integrity during shipping.

### Size range above 10 mm

**ASBW** machining rods are supplied by standard in bundles either of approximately 1.000 kg or 500 kg. Different bundle weights are also possible upon customer's request. Each bundle is steel strapped three times on cardboard and both ends are protected with burlap, to ensure the material integrity during the transportation.

## Labeling

In order to ensure, the traceability according to NP EN ISO 9001:2015, each bale (wooden box or bundle) is marked with a label indicating the details mentioned below:

- customer
- number of customer's order
- EN Standard of the material
- **ASBW** material code
- rod length
- **ASBW**'s PO number
- **ASBW**'s Quality Approval Seal


## Quality and environment

**ASBW** has a certified quality management system in place according to EN ISO 9001:2015 and is committed to its customers in continuously improve the quality of production.

Environment is a concern and global responsibility, to which **ASBW** is compliant with. **ASBW** adopts a policy of Social Responsibility, reducing the environmental impact of its activities. Believing in the compatibility between technological progress and environmental preservation, we are licensed at environmental level with APA (Environmental Agency) license number 86120.

## Technical service

At **ASBW** we see our customers as business partners. Considering that, we supply not only brass rods but also our expertise and technical know-how that results from decades of experience and research. Our commitment is on-time discussion of any aspect of your production from the planning stage, providing you with detailed information about product properties, further processing and delivery options.

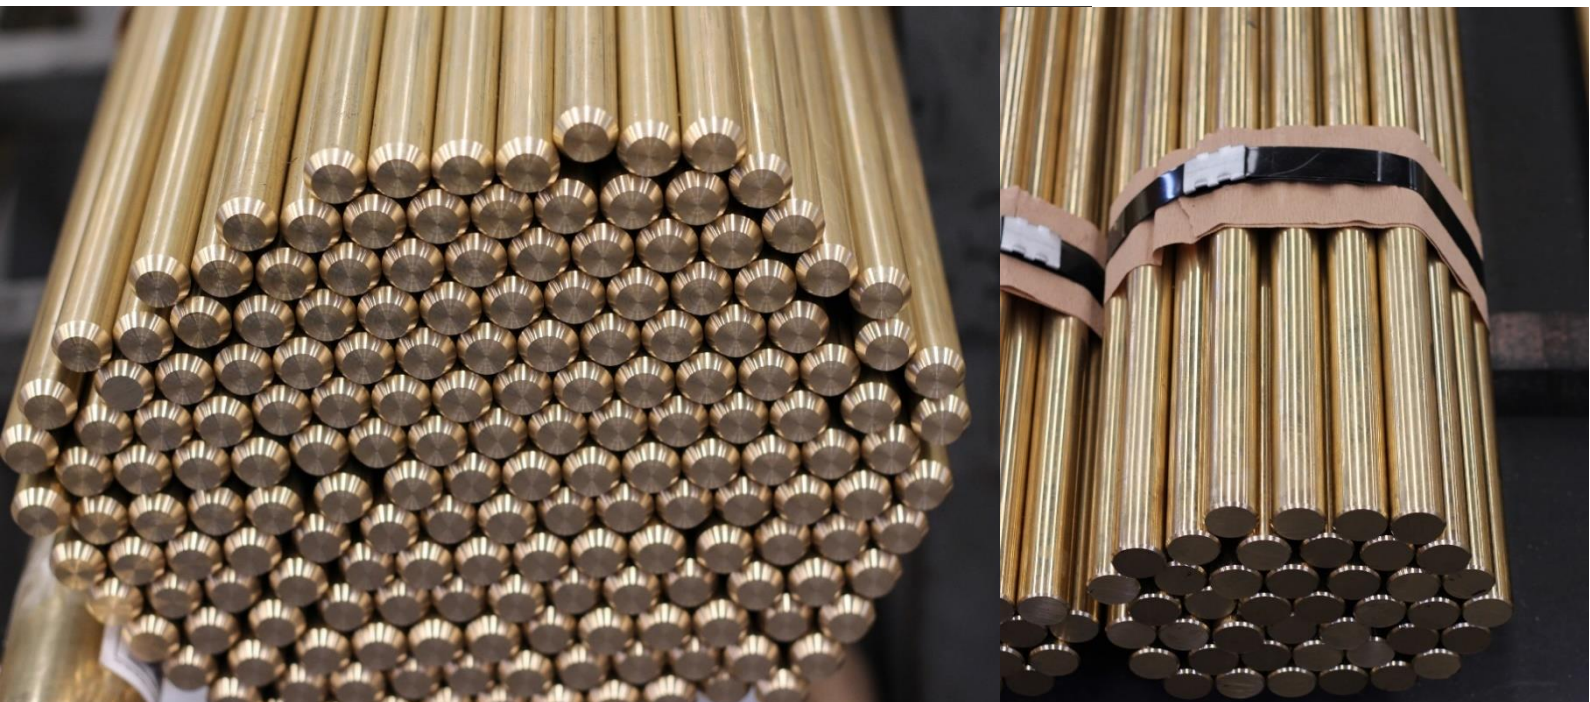

# Performance characteristics

Diam. $\emptyset$ [mm]	Note	Mechanical properties											Packaging	Diam. $\emptyset$ [mm]				
		ISO Tolerance [mm]	Straight-ness [mm/m]	Out-of-roundness [mm]	Length [mm]	Chamfer angle of inclination	Chanfer Length [mm]	Point Length [mm]	Tolerance on cut length [mm]	Material Condition	Rm [MPa]	Rp0.2 [MPa]			A [%]			
5	Extruded and Draw	+0/-0,030	Up on agreement between customer and supplier	max. 0,002	3000±50  (more lengths possible up to 5000 mm upon customer's request)	usually 30 degrees  a 45 degree angle is possible on customer's request	0,2 to 1,0	1,5 to 4,0	±50	R 500	≥ 500	≥350	≥ 5	in boxes of 500kg 500kg lined with waxed paper	5			
5,5																		
5,6																		
6																		
7																		
8																		
9																		
10																		
11																		
12																		
13																		
14																		
15																		
16																		
17																		
18																		
19																		
20																		
21																		
22																		
23																		
24																		
25																		
26																		
27																		
28																		
29																		
30																		
31																		
32																		
33																		
34																		
35																		
36																		
37																		
38																		
39																		
40																		
41																		
42																		
43																		
44																		
45																		
46																		
47																		
48																		
			+0/-0,043	0,4 mm (localized over any 400 mm length)			max. 0,003				0,2 to 2,0	3,0 to 10,0					In bundles of approx. 500 kg (alternatively available in bundles of approx. 1.000 kg) with steel strap and corrugated cardboard as well as sack cloth on one side	11
12																		
13																		
14																		
15																		
16																		
17																		
18																		
19																		
20																		
21																		
22																		
23																		
24																		
25																		
26																		
27																		
28																		
29																		
30																		
31																		
32																		
33																		
34																		
35																		
36																		
37																		
38																		
39																		
40																		
41																		
42																		
43																		
44																		
45																		
46																		
47																		
48																		
		+0/-0,052		max. 0,004			0,2 to 3,0			R 430	≥ 430	≥ 220	≥ 10	21				
22																		
23																		
24																		
25																		
26																		
27																		
28																		
29																		
30																		
31																		
32																		
33																		
34																		
35																		
36																		
37																		
38																		
39																		
40																		
41																		
42																		
43																		
44																		
45																		
46																		
47																		
48																		
		+0/-0,120		max. 0,005			0,5 to 3,0	4,0 to 12,0					tops marked according to customer's specification	31				
32																		
33																		
34																		
35																		
36																		
37																		
38																		
39																		
40																		
41																		
42																		
43																		
44																		
45																		
46																		
47																		
48																		
				max. 0,006			0,5 to 3,0							41				
42																		
43																		
44																		
45																		
46																		
47																		
48																		



# Performance characteristics

Diam. Ø [mm]	Note	Mechanical properties												Packaging	Diam. Ø [mm]		
		ISO Tolerance [mm]	Straight- ness [mm/m]	Out-of- round- ness [mm]	Length [mm]	Chamfer angle of inclination	Chanfer Length [mm]	Point Length [mm]	Tolera- nce on cut length [mm]	Material Condition	Rm [MPa]	Rp0.2 [MPa]	A [%]				
49	Extruded and Draw	h10	+0 -0.120	0,4 mm (localized over any 400 mm length)	máx. 0,006	3000±50 (more lengths possible up to 5000 mm upon customer's request)	usually 30 degrees a 45 degree angle is possible on customer's request	0,5 to 3,0	4,0 to 12,0	±50	R 430	≥ 430	≥ 220	≥ 10	In bundles of approx. 500 kg (alternatively available in bundles of approx. 1.000 kg) with steel strap and corrugated cardboard as well as sack cloth on one side	tops marked according to customer's specification	49
50											50						
51											51						
52											52						
53											53						
54											54						
55											55						
56											56						
57											57						
58											58						
59											59						
60											60						
61	Only extruded, not Draw	-	± 0,70	Up on agreement between customer and supplier	máx. 0,1	3000±50 (more lengths possible up to 5000 mm upon customer's request)	usually 30 degrees a 45 degree angle is possible on customer's request	Both ends sawn, without burr	Both ends sawn, without burr	±50	R360	≥ 360	≤ 350	≥ 20	In bundles of approx. 500 kg (alternatively available in bundles of approx. 1.000 kg) with steel strap and corrugated cardboard as well as sack cloth on one side	tops marked according to customer's specification	61
62											62						
63											63						
64											64						
65											65						
66											66						
67											67						
68											68						
69											69						
70											70						
71											71						
72											72						
73	73																
74	74																
75	75																
76	76																
77	77																
78	78																
79	79																
80	80																
81	81																
82	82																
83	83																
84	84																
85	85																
86	86																
87	87																
88	88																
89	89																
90	90																
91	91																
92	92																
93	93																
94	94																
95	95																

